



PVC Rigid Conduit Pipes:

Manufactured to surpass both Indian and international standards, Norpack PVC Rigid Conduit Pipes are engineered from a specially formulated PVC. Our state-of-the-art manufacturing processes ensure each pipe offers superior high-impact resistance due to super high-impact material. Every length of conduit is distinctly marked with the prestigious ISI certification, the "Norpack" brand, and precise size and dimension specifications, guaranteeing unmatched quality and reliability.



RIGID PVC CONDUIT PIPE AS PER IS 9537 PART 3

HSN Code: 39172310

Color coding:


- Red for Light mechanical stress
- Blue for medium mechanical stress
- Green for heavy mechanical stress

Colors available:

- Ivory, black grey
(other colors available on request)

Application:

- Channelising concealed and surface wiring
- Telecommunication and cable ducting
- Light, medium and heavy stresses available to fulfil various application and site needs

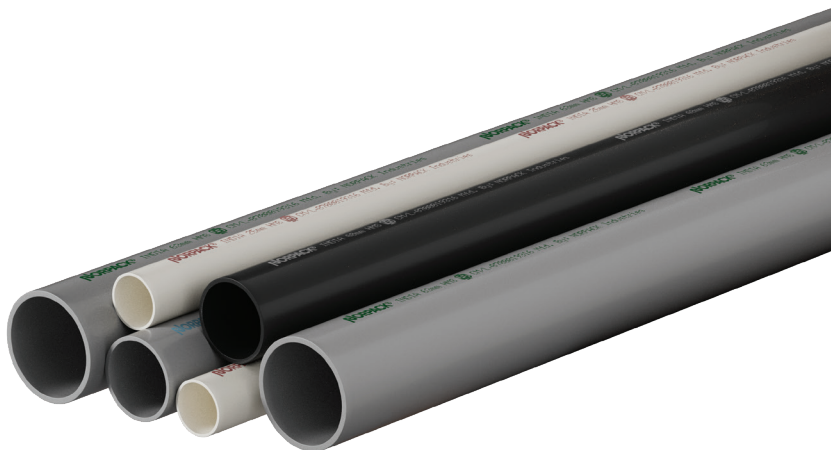

DIMENSION OF RIGID PVC CONDUIT PIPE

Sl No.	Nominal Size (in mm)	Maximum O.D. (in mm)	Minimum O.D. (in mm)	Minimum Internal Diameter		
				LMS	MMS	HMS
1	20	20	19.7	17.40	16.90	15.80
2	25	25	24.6	22.10	21.40	20.60
3	32	32	31.6	28.60	27.80	26.60
4	40	40	39.6	35.80	35.40	34.40
5	50	50	49.5	45.10	44.30	43.20
6	63	63	62.4	57.00	-	-
SPECIAL SIZES						
*7	19	19	18.7	16.50	16.00	15.10

(*Non-ISI)

HMS-HEAVY MECHANICAL STRESS

Sl No.	Product Code	Nominal Size	Standard Packing
			Mtrs/Bcls
1	NOR1301	19	120
2	NOR1302	20	120
3	NOR1303	25	75
4	NOR1304	32	45
5	NOR1305	40	45
6	NOR1306	50	30
7	NOR1307	63	15

MMS-MEDIUM MECHANICAL STRESS

Sl No.	Product Code	Nominal Size	Standard Packing
			Mtrs/Bcls
1	NOR1201	19	120
2	NOR1202	20	120
3	NOR1203	25	75
4	NOR1204	32	45
5	NOR1205	40	45
6	NOR1206	50	30
7	NOR1207	63	15

LMS-LIGHT MECHANICAL STRESS

Sl No.	Product Code	Nominal Size	Standard Packing
			Mtrs/Bcls
1	NOR1101	19	120
2	NOR1102	20	120
3	NOR1103	25	75
4	NOR1104	32	45
5	NOR1105	40	45
6	NOR1106	50	30
7	NOR1107	63	15

